




SKAPS woven geotextile fabrics are woven polypropylene materials offering optimum performance when used in stabilization applications. Produced from first quality raw materials, they provide the perfect balance of strength and separation in styles capable of functioning exceptionally well in a wide range of performance requirements. SKAPS W5050F resists ultraviolet resistance, rotting, biological degradation and it is chemically inert to any natural bases or acids.

SKAPS W5050F is NTPEP certified and meets requirements as per AASHTO Standards and/or D.O.T. Standards.

Unless indicated below, all listed properties are Minimum Average Roll Values:

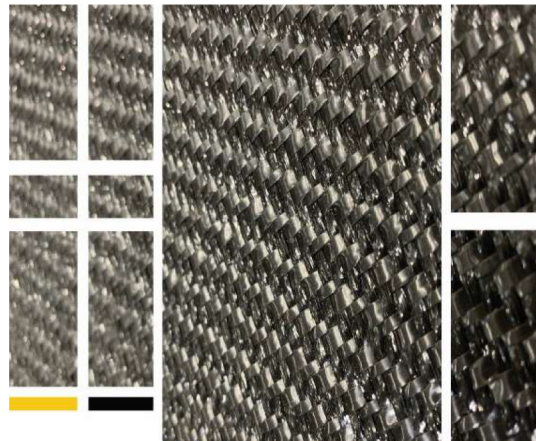

Property	Method	English (MARV <sup>2</sup> )	Metric (MARV <sup>2</sup> )
Grab Tensile	ASTM D 4632	320 lbs	1.43 kN
Grab Elongation	ASTM D 4632	15%	15%
Trapezoidal Tear	ASTM D 4533	125 lbs.	0.56 kN
CBR Puncture Resistance	ASTM D 6241	1500 lbs.	6.67 kN
Permittivity <sup>3</sup>	ASTM D 4491	0.3 Sec <sup>-1</sup>	0.30 Sec <sup>-1</sup>
AOS <sup>3</sup>	ASTM D 4751	40 US Sieve	0.425 mm
UV Resistance	ASTM D 4355	70/500 %/hrs	70/500 %/hrs

### Note

1. The property values listed above are subject to change without notice.
2. Minimum Average Roll Values (MARV) is calculated as the average minus two standard deviations. Statistically, it yields approximately 97.5% degree of confidence that any samples taken from quality assurance testing will meet or exceed the values described above.
3. At time of manufacturing. Handling may change these properties.

*This information is provided for reference purposes only and is not intended as a warranty or guarantee. SKAPS assumes no liability in connection with the use of this information.*